


The LEGEND 9000 Tilt Double Hung window is a high performance, thermally-broken Commercial Grade (C) and Heavy Commercial (HC) grade window with narrow sightlines. The 9000 comes standard with concealed tilt latches, as well as top and bottom continuous lock rails, all of which contribute to its narrow horizontal sightlines. Multiple windows can be produced with a continuous head and sill in a single master frame, reducing handling and installation costs while adding strength to the unit. The LEGEND 9000 has optional common vertical mullions to combine fixed and/or operable windows, reducing the width of the aluminum and increasing the vision area. The LEGEND 9000 is designed for high performance commercial or multi-story residential applications. The LEGEND 9500 provides all the benefits of the 9000 while attaining Heavy Commercial (HC) and Architectural (AW) ratings. Commercial, institutional, or multi-story residential buildings requiring HC or AW performance and minimum visual sightlines will appreciate the versatility of the LEGEND 9000/9500.

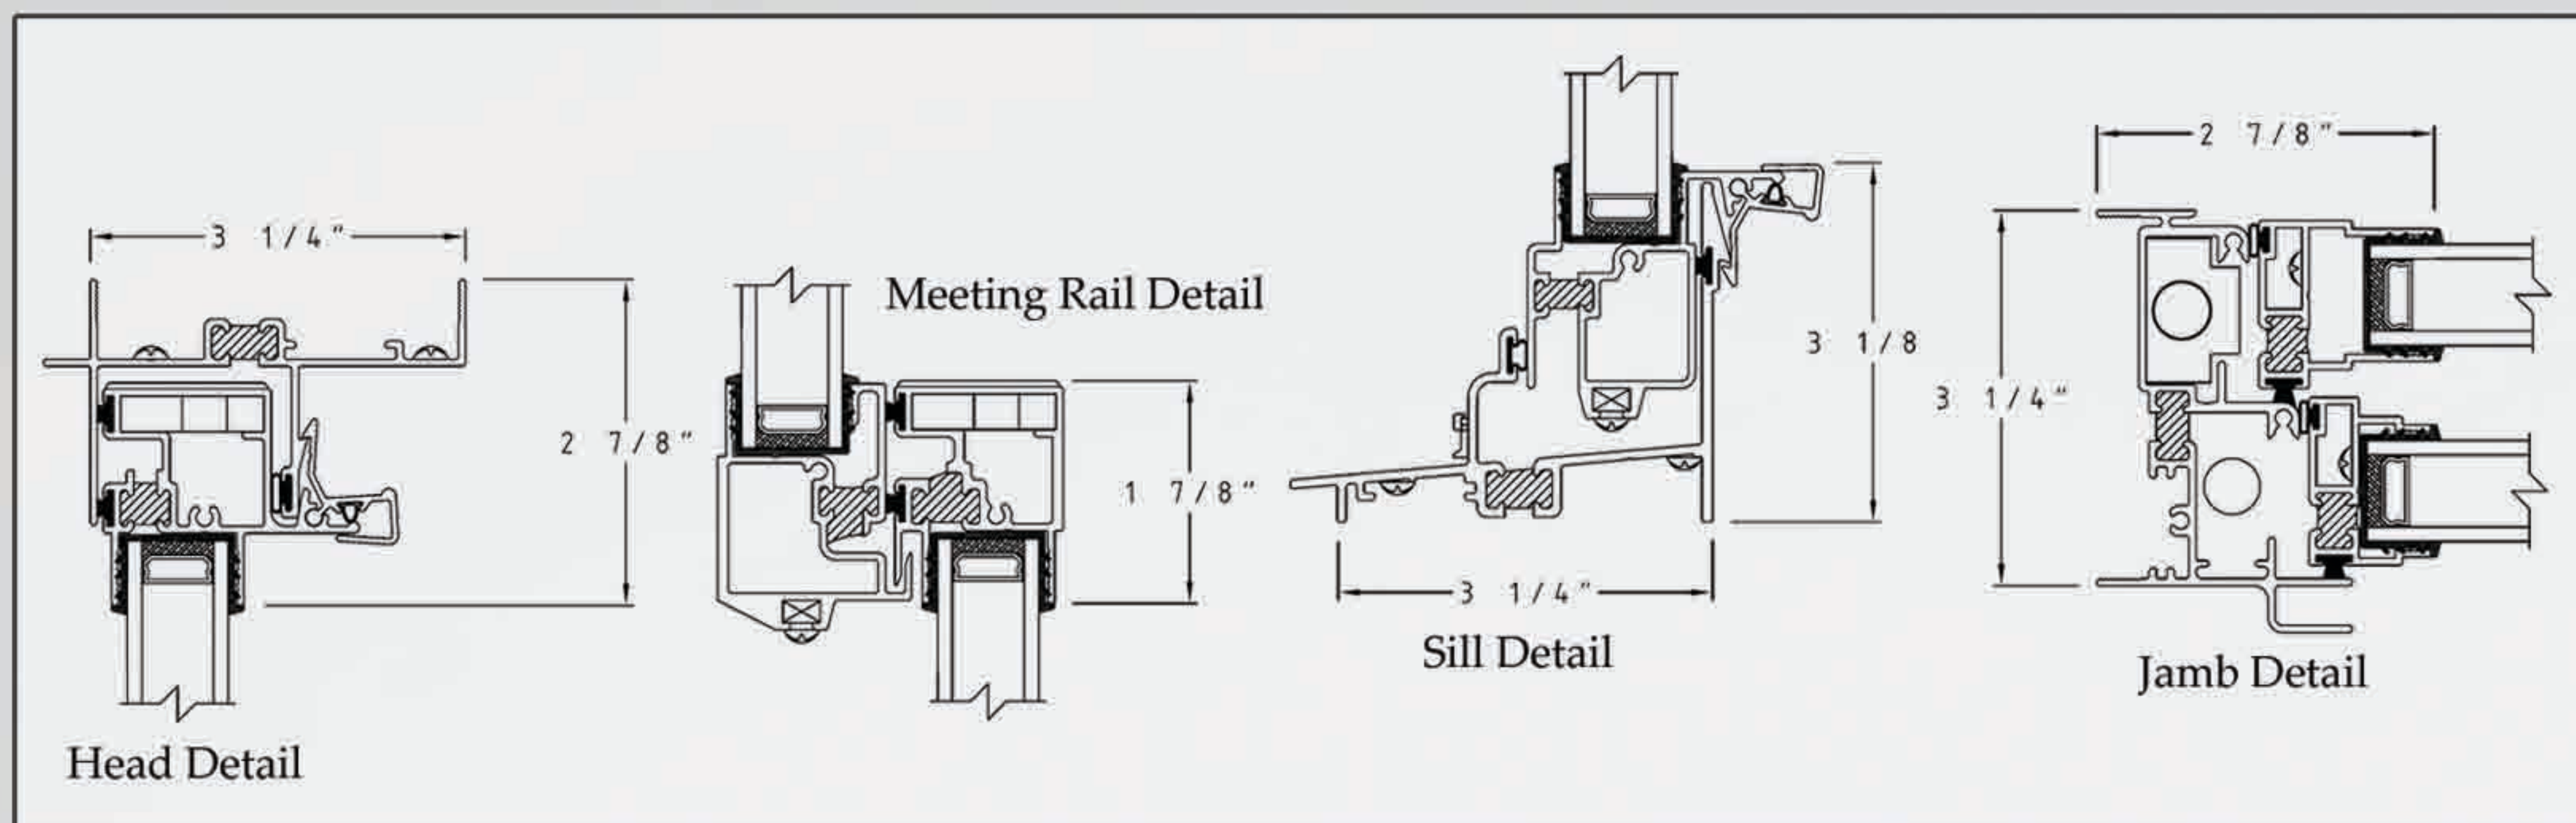

~Quality Products and Service Since 1952~

Legend Features

C, HC, and AW Rated Products	Telescoped Corners	Sill Mounted Jamb
3 1/4" Frame Depth	Solid Stainless Steel Pivot Bars	2 7/8" Jamb
7/8" Insulating Glass	Warm Edge Technology	2 3/4" Head
Dual Seal D/S Glass	Baked Enamel Finish	1 7/8" Meeting Rails
Marine Glazed	Auto Engage/Release Sashes	3 1/8" Sill
Narrow Sightlines	Full Width Knife Edge Interlock	4 7/8" Twin DH 1 Piece Mullion
Continuous Anti-Drift/Top Lock-Rail	Hospital Pocket Sill with Weeps	3 7/8" Fixed/DH 1 Piece Mullion
Bottom Continuous Lift/Lock Rail	Continuous Head and Sill	Metal Sash Stops (9500 Std/9000 Opt)
Fully Thermally-Broken Components	Fin/Seal Compression Weather Stripping	Ultralift Balances (9500 AW)
Concealed Tilt Tatches	Rounded Profiles	

Legend Options

Metal Sash Stops (9000)	True Divide Muntins
Ultralift Balances (9000/9500)	Twist Anchors
Series 97 Balances	L-Angles
EZ Lift Balances	Receptor/Subsill
Dual Balances	Sheet Rock Receptor
Various OITC/STC Ratings	White Vinyls
Trickle Vents	Louvers
Extended Fin Options	Snap Trim
1", 2" & 5 1/2" Expander	Landmark Frame
3" & 5" Dual Expander	Bevel Landmark Frame
Sill & Stool Covers	Square Panning
Tie-in Mullion	Landmark Panning
Stack Mullion	Internal/Landmark Grids
3-Piece Mullion	Child Guards
2-Piece Mullion Covers	Multiple Configurations
Caulk Return	Screen Options
Caulk Stop w/ Return	Solid Panels



Continuous Lift Rail



Narrow Sightlines



Concealed Tilt Latches



Metal Sash Stops



Legend Performance

Champion's Legend Series Double Hung windows are AAMA certified, with test results meeting all the requirements for their respective ratings in accordance with 101/I.S.2-97, 101/I.S.2/A440-05, or 101/I.S.2/A440-08 testing standards. As part of its commitment to quality, Champion maintains a testing facility in which it continuously tests its products, ensuring they continuously meet requirements.

Title of Test	9000 H-C70	9000 H-HC45	9500 H-AW-PG50	9510 FW-HC70
Operating Force	29 lbf	41 lbf	44 lbf	-
Air Infiltration	0.08 cfm ² @ 25mph	0.05 cfm ² @ 25mph	0.17 cfm ² @ 50mph	0.06 cfm ² @ 50 mph
Water Resistance Test Pressure	10.66 psf	11.29 psf	11.08 psf	10.66 psf
Uniform Load Deflection Test Pressure	75.24 psf	45.14 psf	50.16 psf	70.22 psf
Uniform Load Structural Test Pressure	105.33 psf	67.71 psf	75.24 psf	105.33 psf
Forced Entry Resistance	Grade 10	Grade 10	Grade 10	Grade 40